


## **Fleet Management**

Last Updated: Nov 12, 2021

Fleet management systems are complex systems in charge of several activities such as: vehicle telematics (tracking and diagnostics), driver, speed and fuel management, route optimization, cargo tracking, preventive maintenance, among others. The introduction of Artificial Intelligence and Machine Learning (ML) ensures that mechanics, drivers and logistic managers make better decisions.

NXP's processors with real-time networking, sensors, NFC and RFID tracking applications, secure element and ML development platforms such as eIQ, make the right ecosystem to create an efficient fleet management system.

## Fleet Management Block Diagram

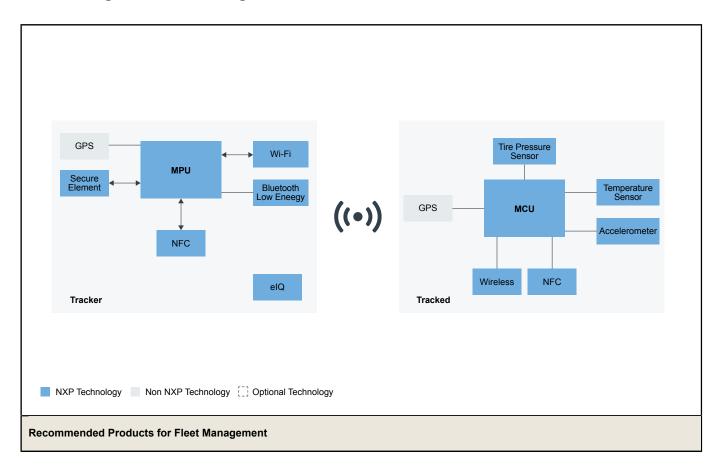

MPU	<ul> <li>LS1043A: Layerscape<sup>®</sup> 1043A and 1023A Processors</li> <li>LS1028A: Layerscape<sup>®</sup> 1028A Applications Processor</li> <li>i.MX8M: i.MX 8M Family - Arm<sup>®</sup> Cortex<sup>®</sup>-A53, Cortex-M4, Audio, Voice, Video</li> </ul>
NFC	PN7160: NFC Plug and Play Controller with Integrated Firmware and NCI Interface
Security (EdgeLock Discrete)	• SE050: EdgeLock <sup>®</sup> SE050: Plug and Trust Secure Element Family – Enhanced IoT security with high flexibility
Bluetooth Low Energy	<ul> <li>K32W061_41: K32W061/41: High-Performance, Secure and Ultra-Low-Power MCU for Zigbee<sup>®</sup>, Thread<sup>™</sup>, and Bluetooth<sup>®</sup> LE 5.0 with Built-In NFC Option</li> </ul>
Wi-Fi	<ul> <li>IW416: 2.4/5 GHz Dual-Band 1x1 Wi-Fi<sup>®</sup> 4 (802.11n) + Bluetooth<sup>®</sup> 5.2 Solution</li> <li>88MW32X 802.11n Wi-Fi<sup>®</sup> Microcontroller SoC</li> </ul>
Wi-Fi	<ul> <li>IW416: 2.4/5 GHz Dual-Band 1x1 Wi-Fi<sup>®</sup> 4 (802.11n) + Bluetooth<sup>®</sup> 5.2 Solution</li> <li>88MW32X 802.11n Wi-Fi<sup>®</sup> Microcontroller SoC</li> </ul>
elQ	• elQ ML Development Environment: elQ <sup>®</sup> ML Software Development Environment
мси	• K32-L3: NXP's Energy Efficient Cortex-M4 MCU with Cortex-M0+ and Advanced Security
TPMS	Tire Pressure Monitoring Systems (TPMS): Tire Pressure Monitoring Systems (TPMS)
Temperature	<ul> <li>P3T1035xUK: I3C, I<sup>2</sup>C-Bus, ±0.5 °C Accuracy, Digital Temperature Sensor</li> <li>P3T2030xUK: I3C, I<sup>2</sup>C-Bus, 2.0 °C Accuracy, Digital Temperature Sensor</li> <li>PCT2075: I<sup>2</sup>C-Bus Fm+, 1 Degree C Accuracy, Digital Temperature Sensor and Thermal Watchdog</li> </ul>
Accelerometer	FXLS8974CF: ±2g/±4g/±8g/±16g, Low-Power 12-Bit Digital IoT Accelerometer

## View our complete solution for Fleet Management.

Note: The information on this document is subject to change without notice.

## www.nxp.com

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2024 NXP B.V.