



Development Board for MC56F83xxx Digital Signal Controllers

MC56F83000-EVK

Last Updated: Nov 22, 2023

The MC56F83000-EVK is an ultra-low-cost development platform for digital signal controller MC56F83xxx MCU.

The kit is form-factor compatible with the Arduino™ R3 pin layout and features ROM bootloader supporting SCI, IIC and CAN.

Peripherals enable rapid prototyping, including a 6-axis digital accelerometer and magnetometer to create full eCompass capabilities, 6 buffered LEDs indicating PWM signals, 4 user LEDs, 4 user push-buttons for direct interaction, an SPI interfaced Flash memory, a high speed CAN transceiver circuit, a USBOTG connector and a USB to UART bridge circuit.

The MC56F83000-EVK features onboard OSBDM circuit enabling debugging and programming with CodeWarrior.

MC56F83000-EVK Call Out Block Diagram


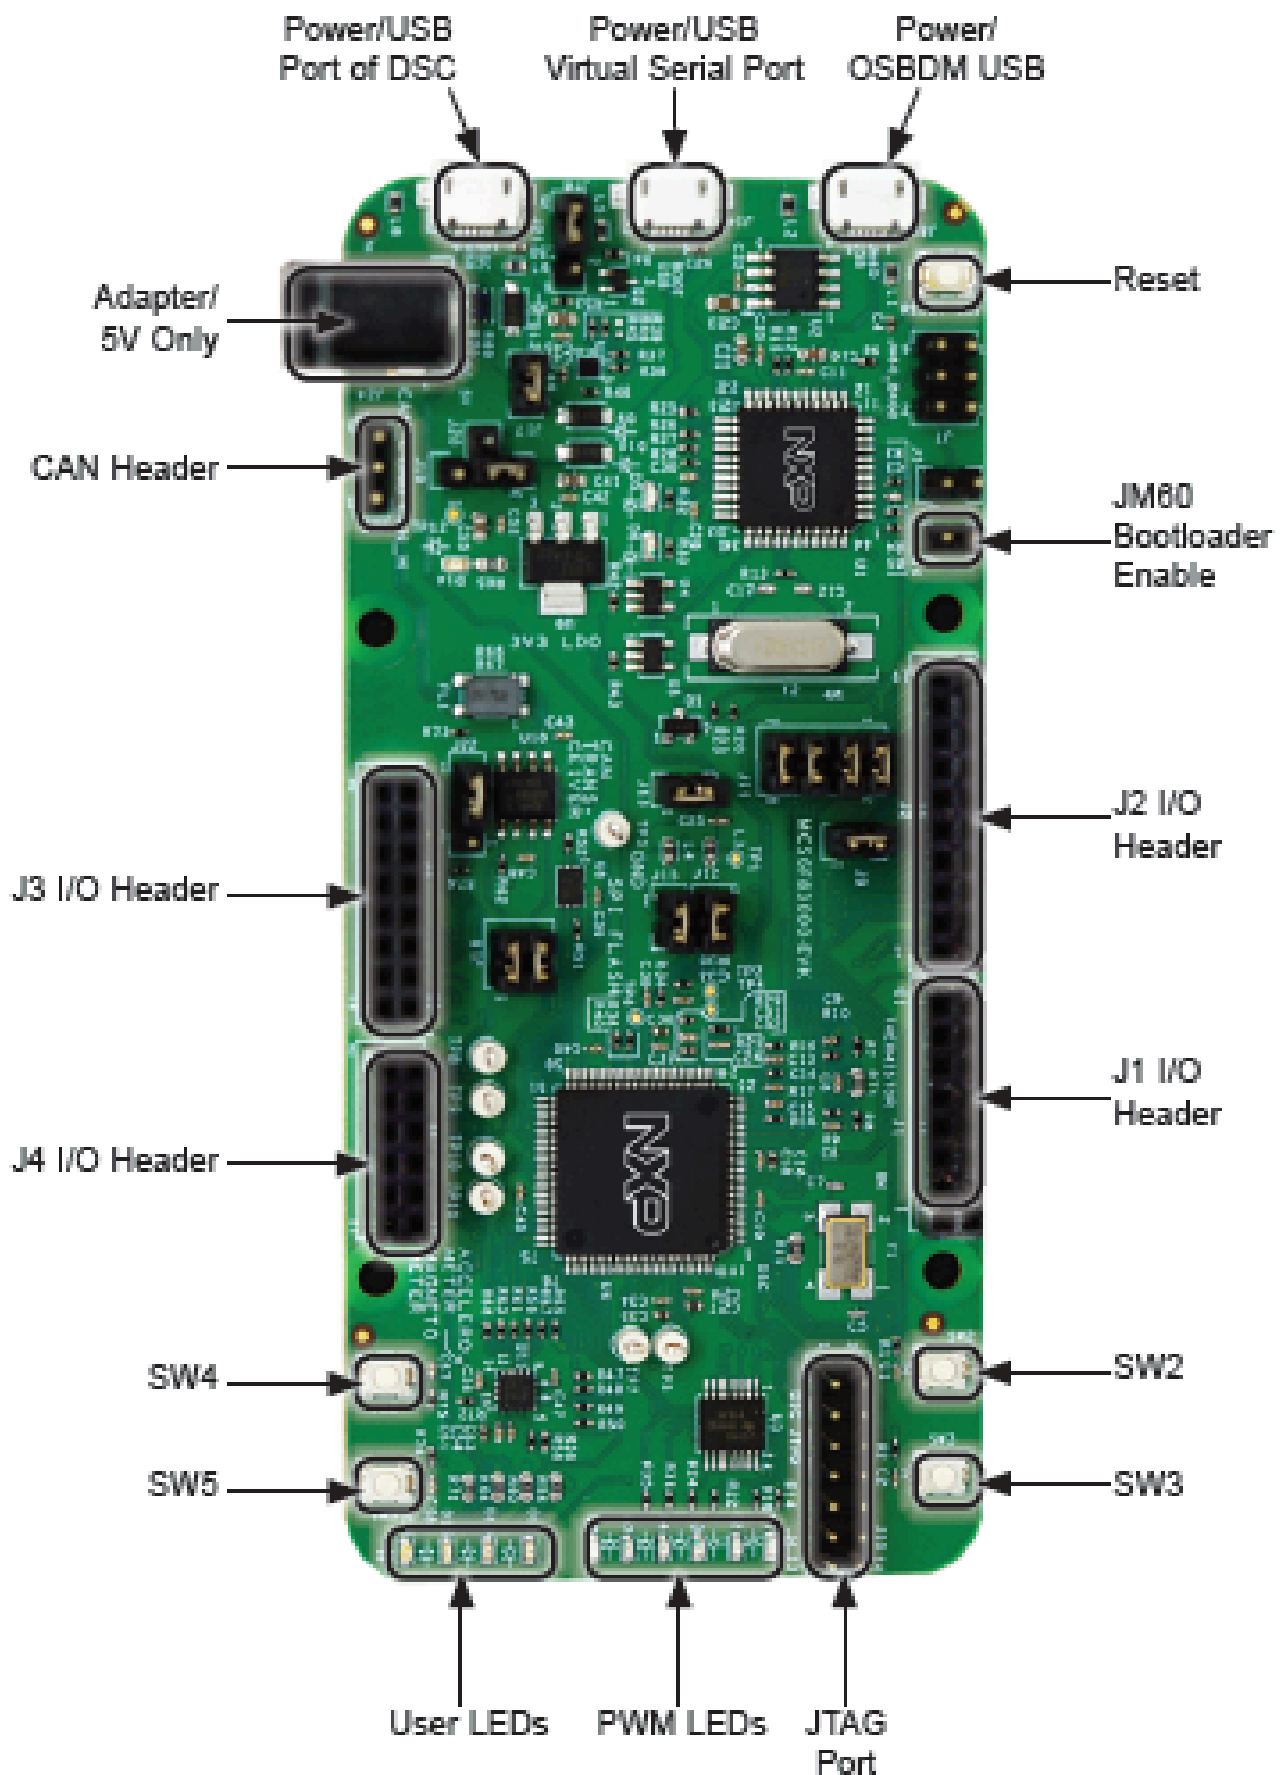


Figure 1: MC56F83000-EVK Callouts

MC56F83000-EVK Pin Out Block Diagram

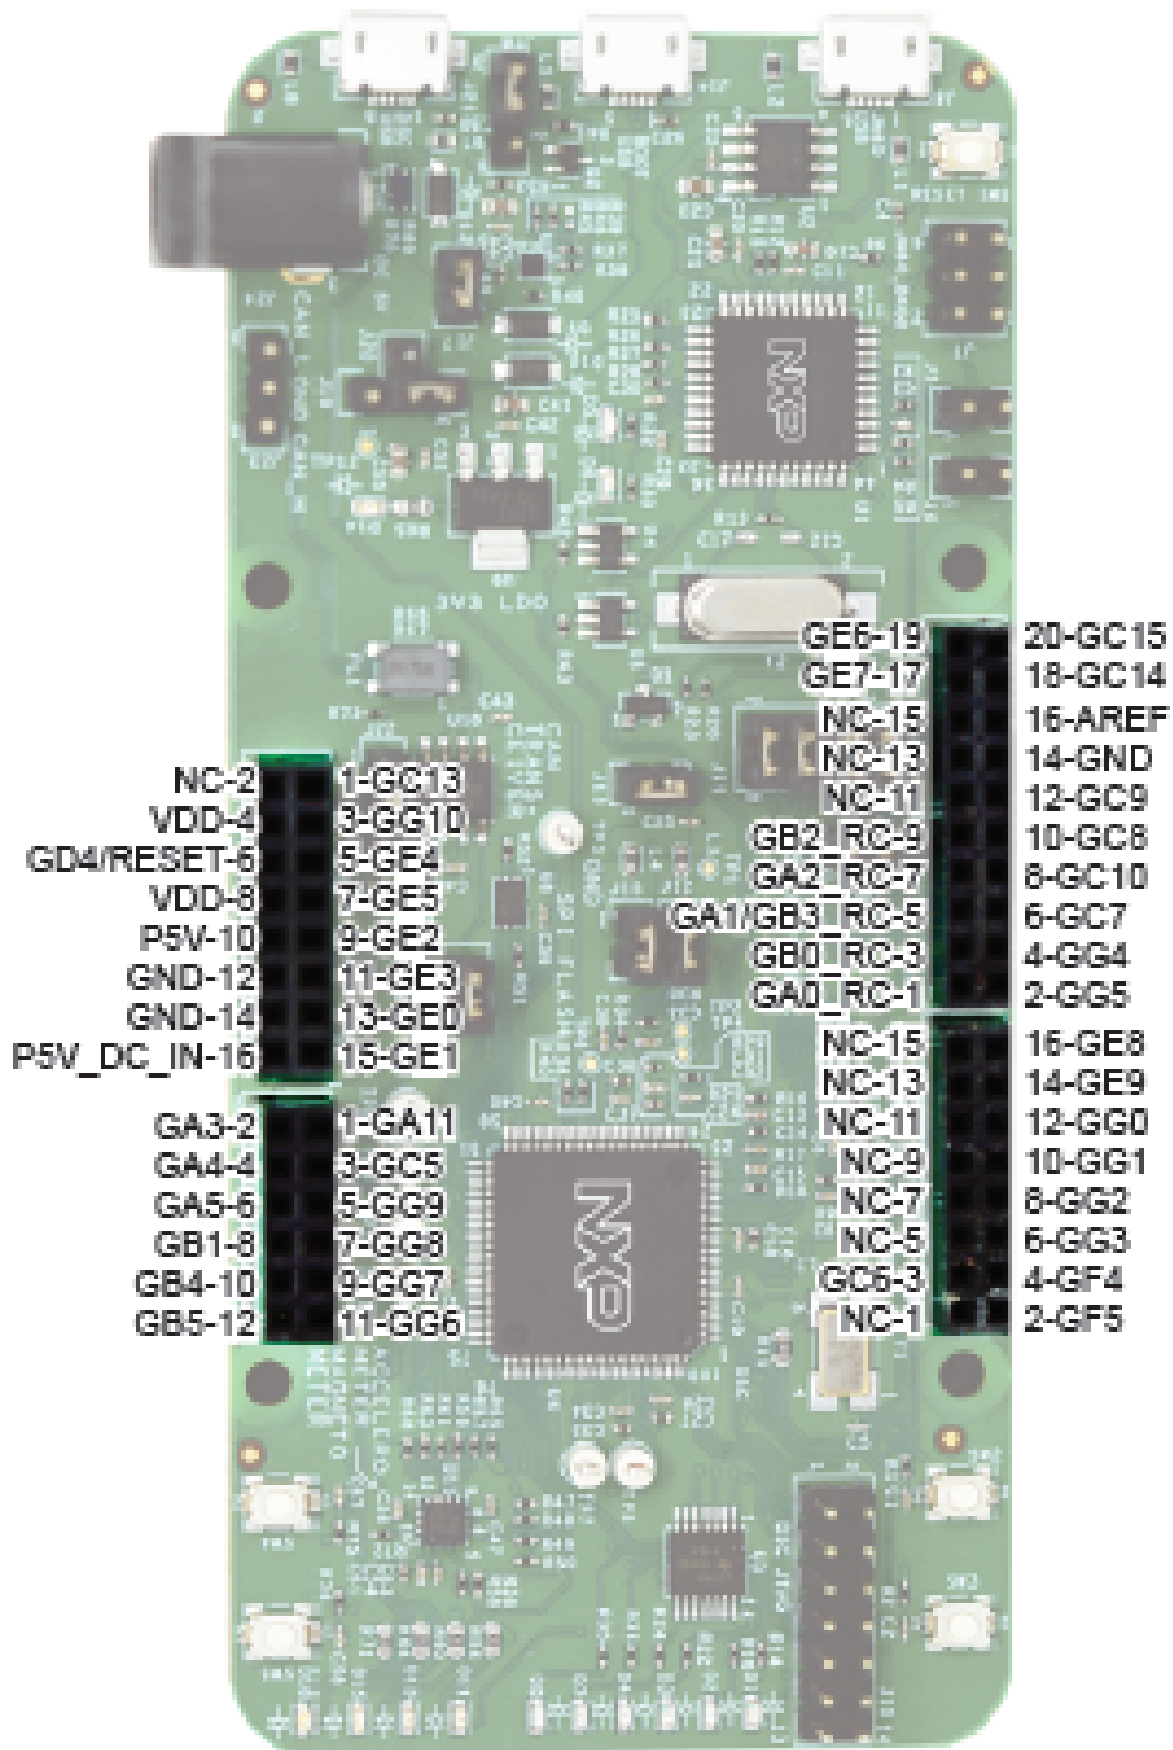

		GE6-19	20-GC15
		GE7-17	18-GC14
		NC-15	16-AREF
		NC-13	14-GND
		NC-11	12-GC9
NC-2	1-GC13	GB2_RC-9	10-GC8
VDD-4	3-GG10	GA2_RC-7	8-GC10
GD4/RESET-6	5-GE4	GA1/GB3_RC-5	6-GC7
VDD-8	7-GE5	GB0_RC-3	4-GG4
P5V-10	9-GE2	GA0_RC-1	2-GG5
GND-12	11-GE3		
GND-14	13-GE0	NC-15	16-GE8
P5V_DC_IN-16	15-GE1	NC-13	14-GE9
		NC-11	12-GG0
GA3-2	1-GA11	NC-9	10-GG1
GA4-4	3-GC5	NC-7	8-GG2
GA5-6	5-GG9	NC-5	6-GG3
GB1-8	7-GG8	GC6-3	4-GF4
GB4-10	9-GG7	NC-1	2-GF5
GB5-12	11-GG6		

View additional information for [Development Board for MC56F83xxx Digital Signal Controllers](#).

Note: The information on this document is subject to change without notice.

www.nxp.com

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2024 NXP B.V.