



S32K312EVB-Q172 Evaluation Board for Automotive General Purpose

S32K312EVB-Q172


Last Updated: May 2, 2024

The S32K312EVB-Q172 is an evaluation and development board for general-purpose industrial and automotive applications.

Based on the 32-bit Arm®Cortex®-M7 S32K3 MCU in a 172 HDQFP package, the S32K312EVB-Q172 offers a single core mode, HSE security engine, OTA support, advanced connectivity and low power.

The S32K312EVB-Q172 offers a standard-based form factor compatible with the Arduino® UNO pin layout, providing a broad range of expansion board options for quick application prototyping and demonstration.

S32K312EVB-Q172 Block Diagram

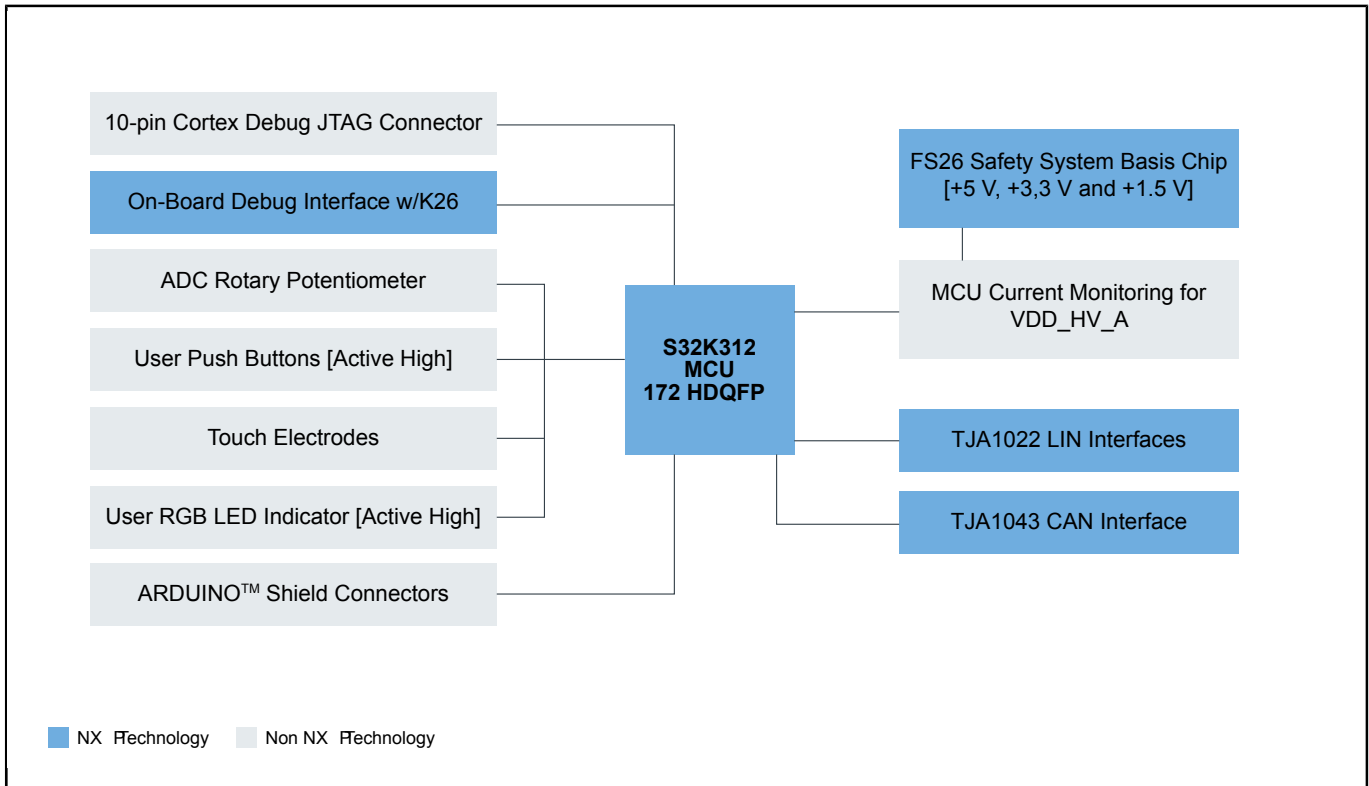

S32K3 Family Block Diagram

K311	K312	K314	Common Features	K322	K324	K341	K342	K344	K328	K338	K348	K358	
1 x Arm® Cortex-M7 @120 MHz		1x Cortex-M7 @240MHz	AEC-Q100, 125 °C, 3,3/5 V	2 x Cortex-M7 @240 MHz		1 Lockstep Cortex-M7 @ 240 MHz			2 x Cortex-M7 @ 240 MHz	3 x Cortex-M7 @ 240 MHz	1 LS Cortex-M7 @ 240 MHz	1 LS Cortex-M7 + 1 Cortex-M7 @ 240 MHz	
1 MB Flash	2 MB Flash	4 MB Flash	HSE-B Crypto Security Engine	2 MB Flash	4 MB Flash	1 MB Flash	2 MB Flash	4 MB Flash	8 MB Flash				
128 K SRAM	192 K SRAM	512 K SRAM	FOTA (Firmware Over-the-Air)	256 k SRAM	512 k SRAM	256 k SRAM	256 k SRAM	512 k SRAM	1152 KB SRAM	1152 KB SRAM	1152 KB SRAM	1152 KB SRAM	
up to 84 I/Os	up to 143 I/Os	up to 218 I/Os	Low-Power Operating Modes and Peripherals (LP UART, FlexIO)	up to 143 I/Os	up to 218 I/Os	up to 143 I/Os	up to 143 I/Os	up to 218 I/Os	up to 218 I/Os				
16-ch, eDMA		32-ch, eDMA	ASIL B/D Safety: (ECC Memories, MPU, CRC, Watchdogs)	32-ch, eDMA					32-ch, eDMA				
3 x CAN (3 x FD)	6 x CAN (6 x FD)		100 Mbit/s Ethernet (TSN)	4 x CAN (4 x FD)	6 x CAN (6 x FD)	4 x CAN (4 x FD)	4 x CAN (4 x FD)	6 x CAN (6 x FD)	8 x CAN (8 x FD)	8 x CAN (8 x FD)	8 x CAN (8 x FD)	8 x CAN (8 x FD)	
			100 Mbit/s Ethernet (TSN)	100 Mbit/s Ethernet (TSN)					1 Gbit/s Ethernet (TSN)				
2 x I2C	2 x I2C	2 x I2C	eMIOS Timers, Analogue Comparator, Logic Control Unit, Body Cross Triggering Unit, Trigger Mux	2 x I2C	2 x I2C	2 x I2C	2 x I2C	2 x I2C	2 x I2C				
4 x SPI*		6 x SPI*	JTAG	4 x SPI*	6 x SPI*	4 x SPI*	4 x SPI*	6 x SPI*	6 x SPI*				
2 x 24-ch, 12-bit ADC		3 x 24-ch, 12-bit ADC	S32 Design Studio IDE	2 x 24-ch, 12-bit ADC	3 x 24-ch, 12-bit ADC	2 x 24-ch, 12-bit ADC	2 x 24-ch, 12-bit ADC	3 x 24-ch, 12-bit ADC	3 x 24-ch, 12-bit ADC				
			Quad SPI	2 x SAI (FS)					2 x SAI (FS)				
			Real-Time Drivers (AUTOSAR® and Non-AUTOSAR)	Quad SPI					Quad SPI + SDHC (SDIO)				
LOFP-48	HDQFP-172		Security FW Safety Software Framework Application Software	HDQFP-172					HDQFP-172				
HDQFP-100				HDQFP-100		HDQFP-100	HDQFP-100						
				MAPBGA-257					MAPBGA-257	MAPBGA-289			

View additional information for [S32K312EVB-Q172 Evaluation Board for Automotive General Purpose](#).

Note: The information on this document is subject to change without notice.

www.nxp.com

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2024 NXP B.V.