SOT1180-1
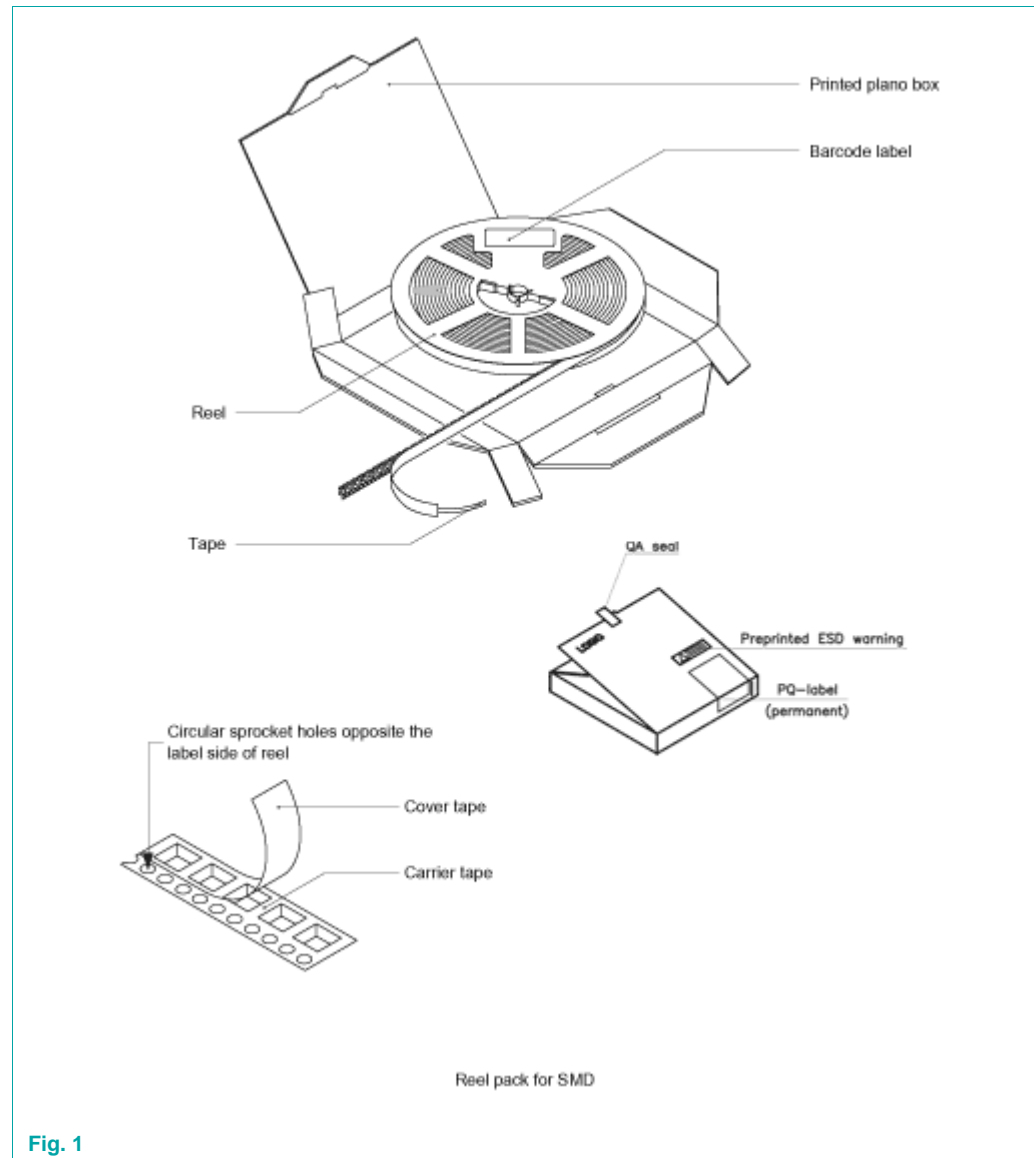
Standard product orientation 12NC ending 118

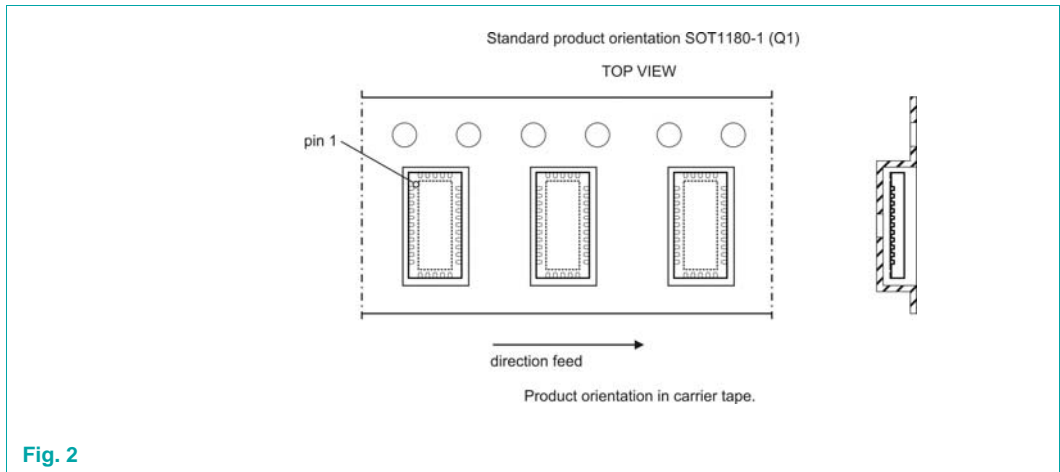Rev. 01 — 27 July 2011 Packing information

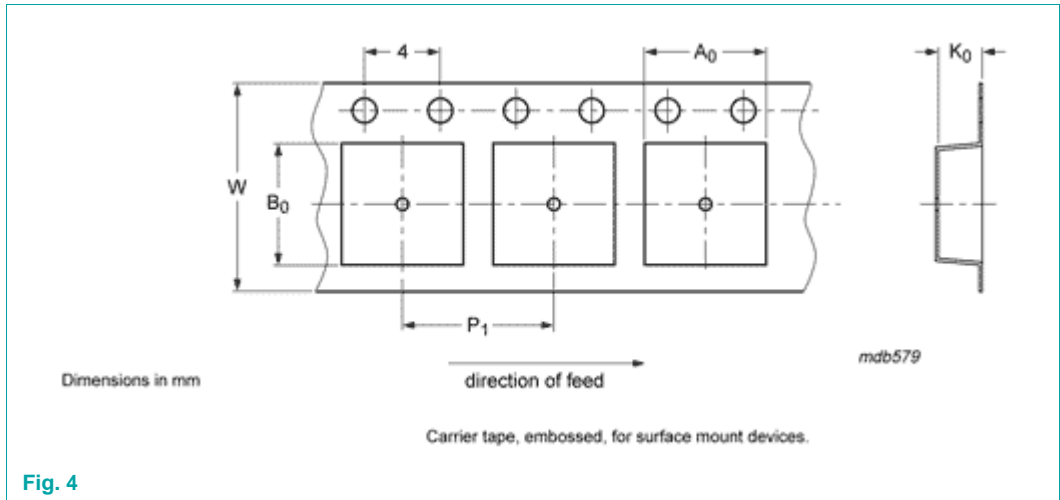## 1. Packing method

Reel pack for SMD

Fig. 1

Package version	12NC ending	Reel dimensions d x w (mm)	SPQ/PQ (pcs)	Reels per box	Outer box dimensions l x w x h (mm)
SOT1180-1	118	330 x 16	5000	1	339 x 1335 x 25

2. Product orientation

Standard product orientation SOT1180-1 (Q1)

TOP VIEW

pin 1

direction feed

Product orientation in carrier tape.

Fig. 2

3. Carrier tape dimensions

Dimensions in mm

direction of feed

Carrier tape, embossed, for surface mount devices.

mdb579

Fig. 4

12NC ending	A$_0$ (mm)	B$_0$ (mm)	K$_0$ (mm)	T (mm)	P$_1$ (mm)	W (mm)
118	3.30	6.30	1.00	-	8.0	16

4. Reel dimensions
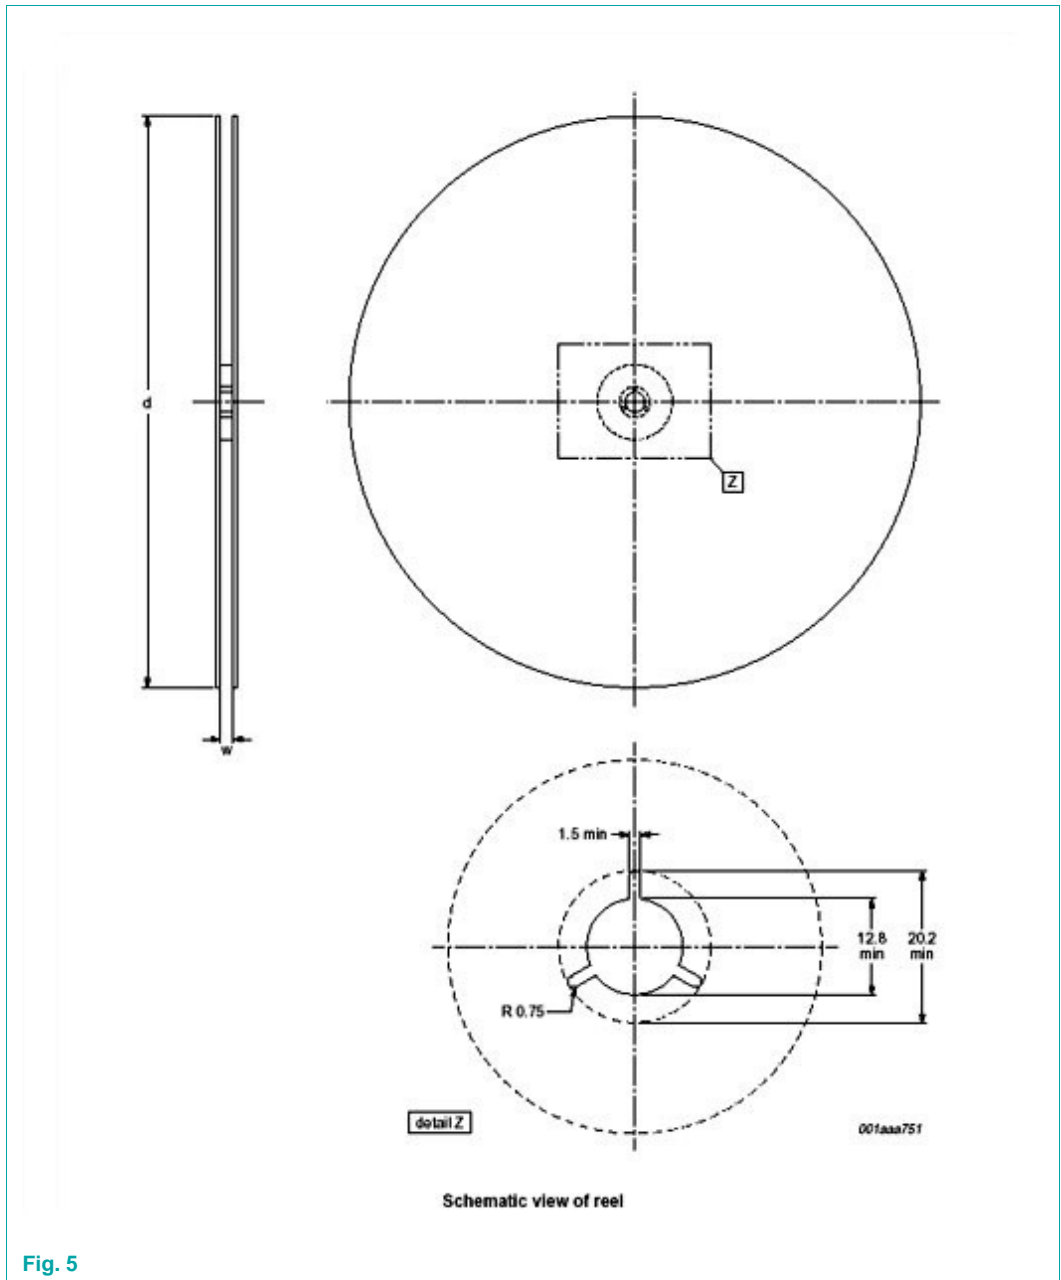
Fig. 5

Package version	12NC ending	Reel dimensions d x w (mm)	SPQ/PQ (pcs)
SOT1180-1	118	330 x 16	5000

5.   Barcode label tape and box information
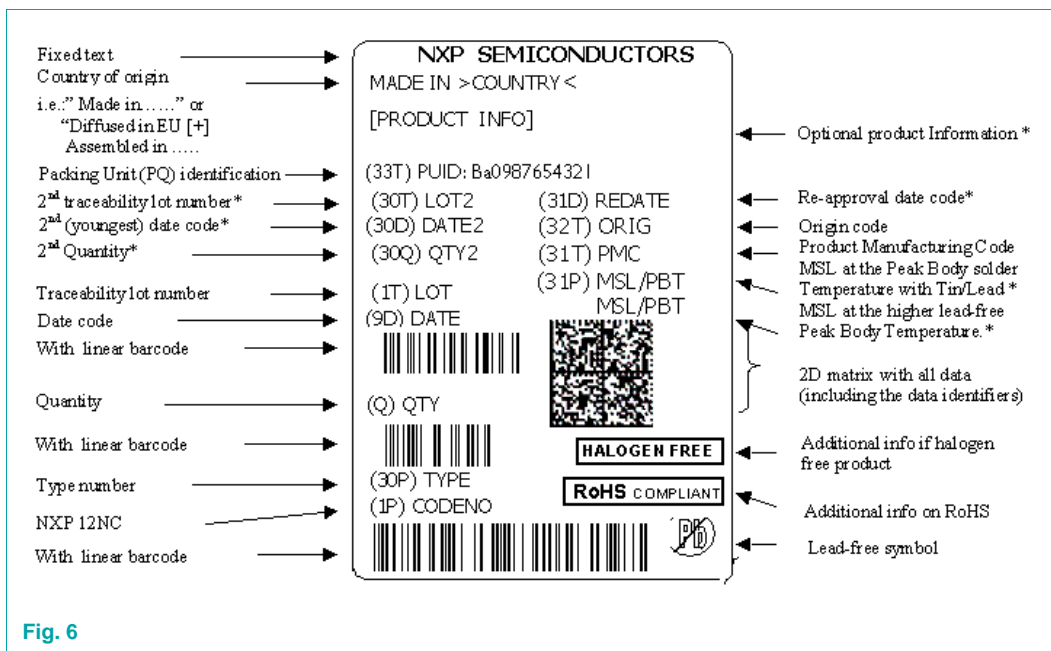
Fig. 6

Label dimensions l x w (mm)
100 x 75